

## 12MCS500

**LOW & MID FREQUENCY TRANSDUCER MCS Series** 



- High power handling: 1.000 W program power
- 2,5" copper wire voice coil
- Beyma's Malt Cross® Cooling System
- Low power compression looses
- High sensitivity: 98 dB (1W / 1m)
- Optimized pressed steel frame

- FEA optimized magnetic circuit
- Aluminum demodulating ring
- Weatherproof cone treatment for both sides of the cone
- Optimized for 2 or 3 way PA systems and line array applications





## TECHNICAL SPECIFICATIONS

Nominal diameter	300 r	nm 12 in
Rated impedance		8 Ω
Minimum impedance		7,3 Ω
Power capacity <sup>1</sup>		500 W <sub>AES</sub>
Program power <sup>2</sup>		1.000 W
Sensitivity	98 dB	1W / 1m @ Z <sub>N</sub>
Frequency range		65 - 5.000 Hz
Voice coil diameter	63,5 r	nm 2,5 in
BI factor		17,6 N/A
Moving mass		0,059 kg
Voice coil length		19,5 mm
Air gap height		9,5 mm
X <sub>damage</sub> (peak to peak)		40 mm

## THIELE-SMALL PARAMETERS 3

Resonant frequency, f <sub>s</sub>	57 Hz
D.C. Voice coil resistance, R <sub>e</sub>	5,6 Ω
Mechanical Quality Factor, Q <sub>ms</sub>	7,8
Electrical Quality Factor, Qes	0,38
Total Quality Factor, Qts	0,36
Equivalent Air Volume to C <sub>ms</sub> , V <sub>as</sub>	57 I
Mechanical Compliance, C <sub>ms</sub>	132 μm / N
Mechanical Resistance, R <sub>ms</sub>	2,7 kg/s
Efficiency, η <sub>0</sub>	2,6 %
Effective Surface Area, S <sub>d</sub>	0,055 m <sup>2</sup>
Maximum Displacement, X <sub>max</sub> <sup>4</sup>	8 mm
Displacement Volume, V <sub>d</sub>	440 cm <sup>3</sup>
Voice Coil Inductance, Le	1,1 mH

<sup>&</sup>lt;sup>1</sup> The power capaticty is determined according to AES2-1984 (r2003) standard.

<sup>&</sup>lt;sup>2</sup> Program power is defined as power capacity + 3 dB.


<sup>&</sup>lt;sup>3</sup> T-S parameters are measured after an exercise period using a preconditioning power test. The measurements are carried out with a velocity-current laser transducer and will reflect the long term parameters (once the loudspeaker has been working for a short period of time).

 $<sup>^4</sup>$  The X<sub>max</sub> is calculated as (L<sub>vc</sub> - H<sub>ag</sub>)/2 + (H<sub>ag</sub>/3,5), where L<sub>vc</sub> is the voice coil length and H<sub>ag</sub> is the air gap height.



# 12MCS500

LOW & MID FREQUENCY TRANSDUCER
MCS Series

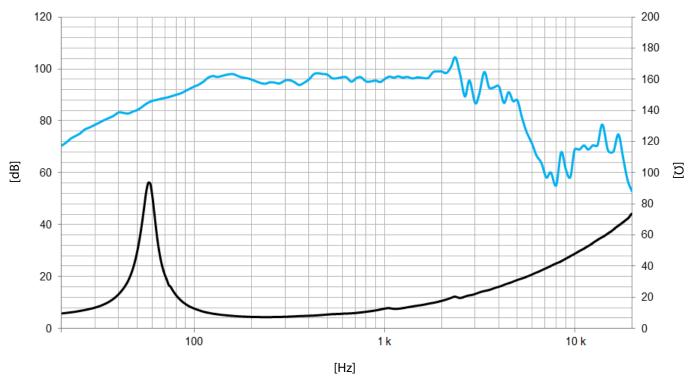

Note: On axis frequency response measured with loudspeaker standing on infinite baffle in anechoic chamber, 1W @ 1m

## **MOUNTING INFORMATION**

Overall diameter	310 mm	12,2 in
Bolt circle diameter	292 mm	11,5 in
Baffle cutout diameter:		
- Front mount	280 mm	11,0 in
Depth	140 mm	5,5 in
Net weight	6 kg	13,2 lb
Shipping weight	6,7 kg	14,8 lb

## **DIMENSION DRAWING**

