


- Ultra Compact 48mm diameter
- 30 W continuous program power capacity
- 1" horn throat diameter
- 36 mm (1.4 in) aluminium voice coil
- HT Polymer diaphragm
- 1000 17000 Hz response
- · 108 dB sensitivity

## **HLX Series - The Helical Approach**

B&C has a reputation for performance, by turning the limits of traditional compression driver design on their head. HLX™: Compression driver efficiency in miniature. TheHLX™ phase plug (US Patent #12149906) has a central channel that is twisted, like DNA, to gain the length required to match the outer channels. This technique works with standard, cost-effective injection mold tooling and plastics by rotating the inner die along a screw profile. The convex dome design, so achieved, has a number of significant cost and performance advantages.

- · Minimized diameter, weight, and cost
- Increased diaphragm area
- Low, ~1kHz Crossover point
- Reduced distortion, especially intermodulation distortion
- More efficient magnetic flux use

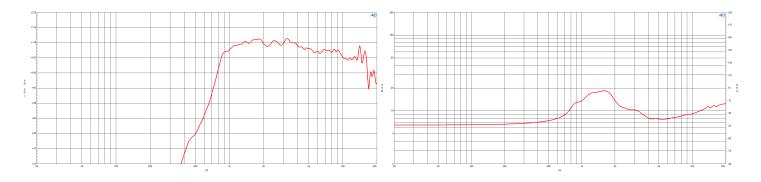



## **SPECIFICATIONS**

Driver mounted on B&C ME 45 horn.

Minimum Impedance       7.8 Ω         Nominal Power Handling       15 W         2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.         Continuous Power Handling       30 W         dling       Power on Continuous Program in defined as 3 dB greater than the Nominal rating.         Sensitivity       108 dB         Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.         Frequency Range       1 kHz - 17 kHz         Recommended Crossover 1 kHz       12 dB/oct. or higher slope high-pass filter.         Voice Coil Diameter       36 mm (1.4 in)         Winding Material       Aluminium         Inductance       0.09 mH	Throat Diameter	25 mm (1 in)
Nominal Power Handling 15 W  2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.  Continuous Power Han- dling Power on Continuous Program in defined as 3 dB greater than the Nominal rating.  Sensitivity 108 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.  Frequency Range 1 kHz - 17 kHz  Recommended Crossover 1 kHz 12 dB/oct. or higher slope high-pass filter.  Voice Coil Diameter 36 mm (1.4 in)  Winding Material Aluminium  Inductance 0.09 mH	Nominal Impedance	8 Ω
2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated minimum impedance.  Continuous Power Handling Power on Continuous Program in defined as 3 dB greater than the Nominal rating.  Sensitivity 108 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.  Frequency Range 1 kHz - 17 kHz  Recommended Crossover 1 kHz 12 dB/oct. or higher slope high-pass filter.  Voice Coil Diameter 36 mm (1.4 in)  Winding Material Aluminium  Inductance 0.09 mH	Minimum Impedance	7.8 Ω
dling Power on Continuous Program in defined as 3 dB greater than the Nominal rating.  Sensitivity 108 dB Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.  Frequency Range 1 kHz - 17 kHz  Recommended Crossover 1 kHz 12 dB/oct. or higher slope high-pass filter.  Voice Coil Diameter 36 mm (1.4 in)  Winding Material Aluminium  Inductance 0.09 mH	Nominal Power Handling	2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated mini-
Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.  Frequency Range 1 kHz - 17 kHz  Recommended Crossover 1 kHz  12 dB/oct. or higher slope high-pass filter.  Voice Coil Diameter 36 mm (1.4 in)  Winding Material Aluminium  Inductance 0.09 mH		Power on Continuous Program is defined as 3 dB greater than the
Recommended Crossover 1 kHz  12 dB/oct. or higher slope high-pass filter.  Voice Coil Diameter 36 mm (1.4 in)  Winding Material Aluminium  Inductance 0.09 mH	Sensitivity	Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Im-
12 dB/oct. or higher slope high-pass filter.  Voice Coil Diameter 36 mm (1.4 in)  Winding Material Aluminium  Inductance 0.09 mH	Frequency Range	1 kHz - 17 kHz
Winding Material Aluminium Inductance 0.09 mH	Recommended Crossover	12 dB/oct. or higher slope
Inductance 0.09 mH	Voice Coil Diameter	36 mm (1.4 in)
	Winding Material	Aluminium
Flux Density 1.8 T	Inductance	0.09 mH
	Flux Density	1.8 T
Diaphragm Material HT Polymer	Diaphragm Material	HT Polymer

## MOUNTING AND SHIPPING INFO

Two M5 holes 180° on 53 mm (2.09 in) diameter. Diameter is 64mm at widest point (driver rotated, across mounting studs)

Overall Diameter	48 mm (1.89 in)
Depth	46 mm (1.81 in)
Net Weight	0.25 kg (0.56 lb)
Shipping Units	1 pcs
Shipping Weight	0.275 kg (0.61 lb)
Shipping Box	105x105x65 mm (4,1x4,1x2,6 in)

## SERVICE KITS

HF replacement-di-	MMDDH3508
aphragm	